


Low intensity LED obstruction light type B

LGP – 900 – R



Compatibility with specifications: ICAO type B

| ELECTRICAL | |
|--|--|
| Power supply | 100-240V AC, 0.7A |
| Light beam | 2x 32 cd typ B |
| Emission level | Min 32 cd @ +/- 10 degree |
| Ingress Protection | IP 65 |
| No radioelectric disturbance | |
| Vitality | Minimum 100 000 hours of continuous work |
| Reliability | 30 independent LED sections (for 5 items) preventing total failure |
| Additional external twilight switch | |
| MECHANICAL | |
| Material | Steel, polycarbonate, red colour |
| Diameter of mounting mast | Max 50,0 mm |

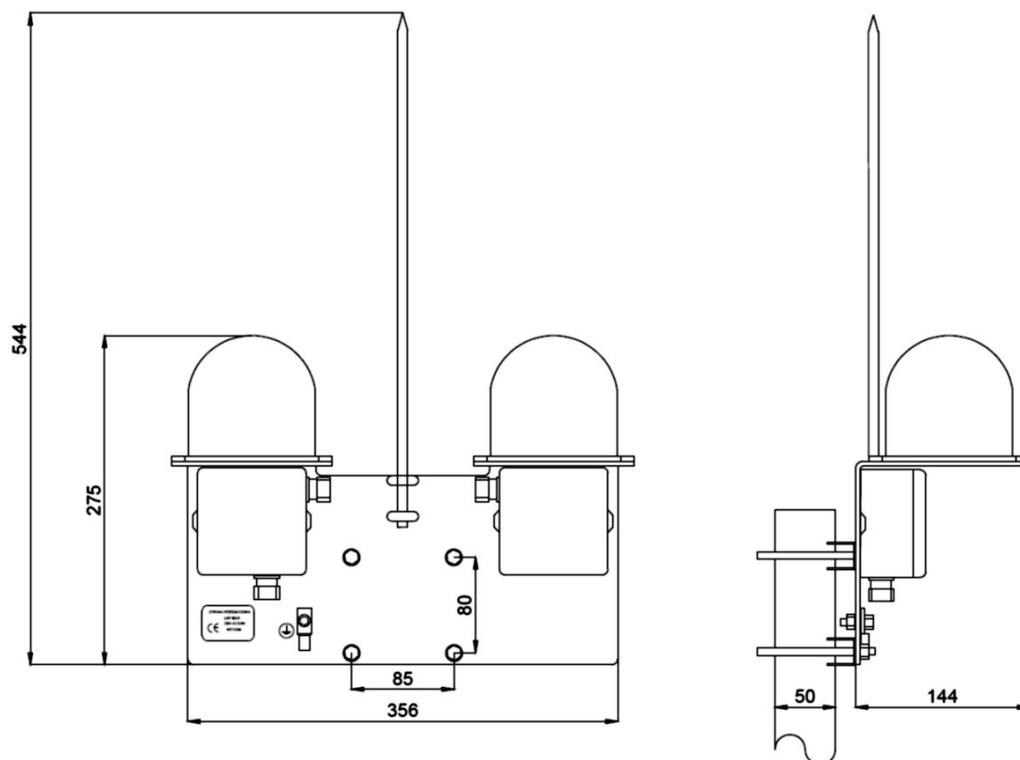

Total dimensions



P.U.P. Net-Com

41-902 Bytom, ul. Piekarska 102/7

tel./fax (32) 282-68-21, 0601-22-08-97

www.net-com.bytom.pl e-mail : biuro@net-com.bytom.pl